


LOOKING FOR A TROUBLE-FREE TINTING SOLUTION?

Blendorama Series III Automatic Dispenser

Engineered to produce high quality and trouble-free tinting — Blendorama III is packed with the goodness of our proven X-SMART design. This automatic dispenser offers internet connectivity and software integration for high throughput, peak performance, and reduced total cost of ownership.

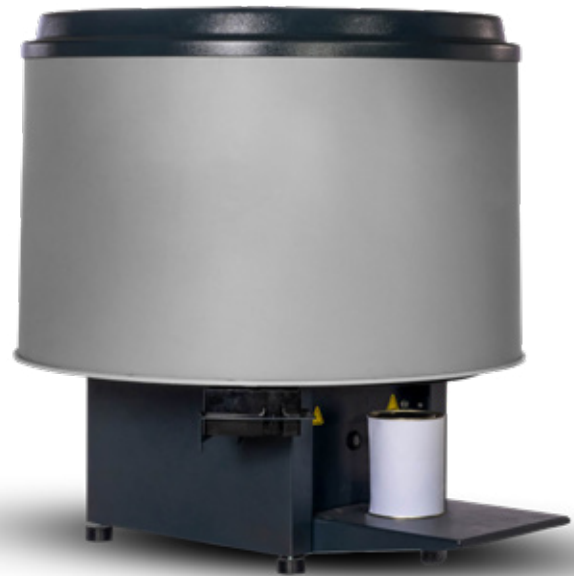

Proven technology

Built with patented piston pump technology for high performance



Optimum capacity

Canister size ideal for daily tinting volumes and sustainable business expansion



Low maintenance

Active nozzle closure eliminates leakage and tubeless design prevents rodent damage



Future ready

Monitor operations remotely with the flexibility of internet connectivity and reliable results



Low footprint

Compact and lightweight tabletop machine that can be placed even on a mixer



Branding opportunities

Add value with 360-degree branding exposure enabled by ergonomic design and modern aesthetics

Blendorama Series III in the spotlight

Specifications & Technical Data



General

- Automatic sequential
- Water-based, universal, solvent-based (optional)



Canister

- Up to 16 canisters
- Material Polymeric (PP/POM)
- Size: 2.25 L
- Click-on-Click-off



Nozzle

- Airtight – integrated nozzle closures
- Nozzle cleaning system – passive brush



Can table

- Manual can shelf
- Dimensions: 38 x 35 cm
- Can loading height: 25 cm
- Max can height: 41 cm (50 cm with no shelf)
- Optical can sensor



Pump

- Proven piston pump technology
- Size: 30 ml
- Flow rate: 0.25 L/m
- Min. dispense: 0.077 ml (1/384 fl. oz.)
- Nozzle diameter: 4 mm
- Polymeric needle valve
- Seals material: Viton
- Calibration - 1st machine only. Subsequent machines copied calibration files. Calibration lasts a machine's lifetime





Dimension and weight

- Net HWD: 79x73x80 cm
- Net weight: 41 kg



Software

- PrismaPro2 desktop tinting application
- Prisma-RT mobile tinting application
- Local language compatible



Power supply

- 90V/264V +/- 10%, 50Hz/60Hz



Maintenance and operations

- Low level (only purge and brush clean)
- Low TCO
- Ease of use
- Minimal operator training



Optional Accessories

- Monitor keyboard arm



Safety

- CE/UL, SASO Certificate

Experience the smartest way of dispensing



Your perfect tinting solution



For more information,
scan the QR code and
get in touch:



Stay connected with us

